



10/53/354
PCT 2003 / 004456
10/531354
INVESTOR IN PEOPLE

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House

Cardiff Road

Newport

South Wales

NP10 8QW.FO

REC'D 13 NOV 2003


PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

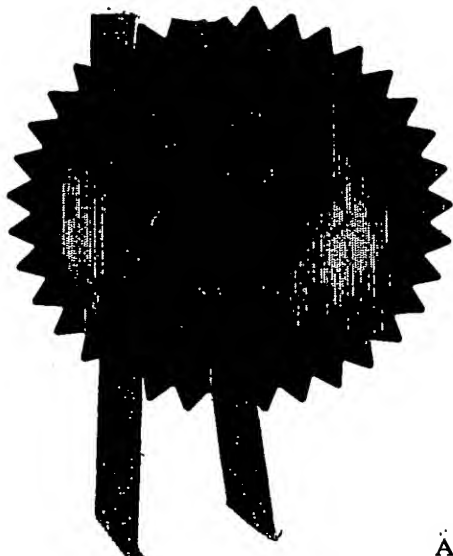

Signed

Dated

30 October 2003

Patent 1/77


The Patent Office

16OCT02 E756002-4 001036
P01/7700 0.00-0223990.3

1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

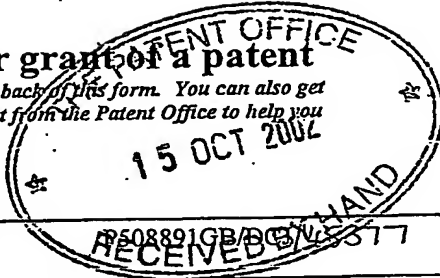

The Patent Office
Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

P508891GB/DC/N/3377

2. Patent application number

(The Patent Office will fill in this part)

15 OCT 2002

0223990.3

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Tyco Electronics Raychem GmbH
Haidgraben 6
D-85521
Ottobrunn
Germany

07787724002

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

Germany

4. Title of the invention

Recoverable Assembly and Method

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

WITHERS & ROGERS
Goldings House
2 Hays Lane
London
SE1 2HW

Patents ADP number (if you know it)

1776001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant,
 - or
 - c) any named applicant is a corporate body.
- See note (d))

YES

Patents Form 1/77

9. ☐ For the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 13

Claim(s) 4

Abstract 0

Drawing (s) 3

10. If you are also filing any of the following, state how many against each item.

Priority documents 0

Translations of priority documents 0

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 0

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) 0

Any other documents -
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

Withers & Rogers

WITHERS & ROGERS

15th October 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

D Colin Jones

+44 (0)20 7663 3500

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least six weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500 505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Recoverable Assembly and Method

This invention relates to a recoverable assembly and its method of use, for recovering a stretched sleeve onto a substrate.

5

Arrangements are known for holding an elastic, typically elastomeric, sleeve in a stretched condition after manufacture until it is required to be recovered in use onto a substrate. One example of such an assembly is disclosed in US-A-3515798 (Minnesota Mining and Manufacturing Company), in which an elastic tubular cover member is supported in a stretched condition on an easily removable one piece rigid helical core having interconnected adjacent coils. Uncoiling of the helix and removal of the core as a continuous narrow strip through the remainder of the helix permits the cover to be recovered onto a substrate disposed therewithin.

10

15 EP-A-0117092 (Minnesota Mining and Manufacturing Company) discloses a modification of US-A-3515798, in which the hollow tubular core for supporting the elastic tubular cover member comprises a cylindrical plastic tube having a plurality of circumferentially spaced, axially extending lugs on the inner wall of the tube and a continuous helical cut extending into the wall of the tube from the exterior surface thereof, severing the tube into a continuous narrow strip such that only the lugs are connected axially along the length of the tube.

20

US-A-5087492 (Societa Cavi Pirelli S.p.A.) discloses a stretched elastic sleeve that is mounted on a tubular supporting body formed by a helically wound tape with

contiguous turns. The tape has transversely extending notches in the inner surface thereof to improve the bendability of the tape. After the assembly of the sleeve and the body is disposed around a substrate, an electric cable joint, the tape is pulled out of the sleeve, permitting the sleeve to contract and to engage the cable.

5

US-A-5560969 (Pirelli Cavi S.p.A) discloses a further tubular supporting element for supporting an elastic sleeve, in which the wall of the element has a groove or incision directed along a helical line and which has a radial depth from the outer surface of the supporting element less than the radial thickness of the supporting element.

10

The stretched elastic sleeve-supporting member of each of the above-mentioned publications comprises a strip of material that is helically wound so as to form a tubular support member. In operation, the supported sleeve is positioned around the substrate to be covered, which may be a joint between electric cables, or a termination of such a cable, and one end of the strip is grasped and pulled back through the supporting member through the annular region between the supporting member and the substrate.

15

As the strip is pulled out from within the elastic sleeve, the sleeve then recovers down onto the substrate. However, with such a hold-out assembly of the elastic sleeve, the operator has continually to pull the strip around the circumference of the substrate due to its helical winding within the sleeve. Furthermore, for a typical 400 mm length of the elastic tube, a strip length of the order of 10 meters has to be provided to form the rigid helical hold-out. It will be appreciated that the helical unwinding of the hold-out strip around the substrate for a length of about 10 meters, or even more, can be very inconvenient, particularly bearing in mind the inherent rigidity that is required for the

20

material of the hold-out tape. Such helical hold-outs are usually manufactured as a linear strip that is then formed into a helical tube. It has been found that a significant helical imprint remains on the inner surface of the elastic sleeve following withdrawal of the hold-out member. The development of such an imprint is exacerbated by the time that the elastic sleeve spends on the hold-out after it is pre-stretched and mounted thereon during manufacture, and stored prior to its release in use onto a substrate.

It is one object of the present invention to provide an assembly comprising a stretched elastic sleeve and a tubular hold-out member that overcomes, or at least alleviates the disadvantages with known assemblies.

In accordance with one aspect of the present invention, there is provided an assembly comprising an elastic sleeve mounted in a radially stretched condition on a tubular member that extends therebeyond at one end of the sleeve, wherein the tubular member includes a plurality of regions of weakness extending circumferentially therearound and discretely spaced apart along the length thereof.

Thus, in accordance with the present invention, a series of circumferential discrete regions of weakness allow the tubular hold-out member to remain in its tubular form as it is pulled back through itself. During this step, the hold-out member may be extended in length by a factor of 20% to 200% depending on design details, but this extension is significantly smaller than that obtained with existing helical hold-outs, so that the operator can conveniently pull the tubular member around the substrate so as to recover the sleeve thereonto. During the recovery process of the sleeve onto the substrate, the

tubular member becomes stretched and has the form of a plurality of generally cylindrical rings interconnected by cylindrical hinges, thus generally retaining its tubular configuration throughout the recovery process.

- 5 Preferably the tubular member is of substantially right-cylindrical configuration, and the regions of weakness extend circumferentially substantially perpendicularly to the longitudinal axis thereof.

Advantageously, each region of weakness extends substantially continuously around the
10 tubular member.

The regions of weakness may comprise indentations extending into the wall of the tubular member. Indentations may extend from the inner surface only, or from the outer surface only, or, preferably, from both surfaces. In the latter configuration,
15 indentations from each surface may alternate along the length of the tubular member, and it is envisaged that a few, for example two, indentations from one surface, preferably the inner surface, may alternate with one indentation from the outer surface.

In an alternative configuration, the regions of weakness may be provided by the tubular
20 member being of convoluted configuration.

The regions of weakness, for example indentations, or slits, may extend a different length longitudinally of the tubular member depending on whether they extend from the

inner or from the outer surface. Advantageously, the inner regions of weakness are longer than the outer regions of weakness.

5 The regions of weakness may effectively divide the tubular hold-out member longitudinally, into a plurality of contiguous rings, the number of rings being dependent on the length of the sleeve and thus of the tubular member. However, typically there may be more than fifty such rings, and as many as sixty or seventy for a sleeve of 400mm length.

10 The ratio of the depth of the regions of weakness transversely to the length of the tubular member to the separation of the regions of weakness longitudinally of the tubular member is at least 1:1, and may be 2:1, or more. However, it is also envisaged that this ratio may be as low as 1:3.

15 Whilst, in order to release the tubular member from inside the stretched sleeve when the assembly is disposed around an elongate substrate, the tubular member extends beyond the sleeve at at least one end thereof, it is preferable that the extension is at least equal to the length of the tubular member holding out the sleeve, so that the extension can be directed from the end back through the tubular member so as to allow it to be grasped
20 beyond the other end of the tubular member thereby to facilitate inverting the tubular member and pulling it back through itself so as progressively to release the elastic sleeve down onto the substrate.

Advantageously the tubular member comprises a thermoplastic material or blends thereof, including cross linked thermoplastic material. Suitable materials are polypropylene (PP), polyethylene (PE), acrylonitrilebutadienestyrene (ABS), polypropylene/ethylenepropylenediene monomer (PP/EPDM) and cross-linked -
5 polyethylene (V-PE).

The tubular hold-out member should, in general, be of such a configuration and constructed of such a material that allows its deformation and/or cracking to facilitate it being inverted and withdrawn back through itself. That is to say, it must be able to
10 change from a state of being mechanically stable with regards to radial pressure, to one in which, whilst retaining a generally tubular shape, it can be inverted and reduce in diameter for withdrawal through itself; the regions of weakness allow this to occur. It will be appreciated, however, that the material of the tubular member has to be selected appropriately. Thus, the more rigid the material is, the thinner the wall thickness must
15 be.

The tubular member may be formed by a moulding process, for example injection moulding or blow moulding, or by an extrusion process.

20 The elastic sleeve of the assembly is preferably made of an elastomer or rubber, preferably silicone or ethylenepropylenediene monomer (EPDM).

The sleeve may be provided as a single layer, or as two or more separate or integrated layers, which may or may not be co-terminous. In the latter case, different layers may

have different mechanical and/or electrical properties as required to suit the substrate and the environment. One of the layers could, for example, be a mastic or a mesh, for example of metal.

5 In accordance with another aspect of the present invention, there is provided a method of enclosing an elongate substrate using an assembly according to any one of the preceding claims, wherein the assembly is positioned around the substrate with the stretched sleeve longitudinally disposed over its final required position with the extension of the tubular member located invertedly in the annular region between the
10 tubular member and the substrate, wherein, whilst maintaining the sleeve in its required position, the free end of the extension is pulled so as to invert the tubular member supporting the sleeve and to withdraw it through itself along the annular region until it is completely removed from the sleeve, thereby allowing the sleeve progressively to recover radially onto the substrate.

15

Although the present invention may be used to recover a suitable elastic sleeve onto any substrate as required, it does find particular advantage in electrical applications, where the sleeve can be recovered onto, for example, a splice between electrical cables, or over the termination of an electrical cable. To this end, the sleeve may be provided
20 with electrical insulating, conductive, semi-conductive, or stress grading and/or weather resistant properties as required.

Embodiments of an assembly and its method of use, each in accordance with the present invention, will now be described, by way of example, with reference to the accompanying drawings, in which:

- 5 Figure 1 is a schematic section through a first embodiment of an elastic sleeve mounted on a tubular hold-out member;

Figure 2 is an enlarged section of the region A of Figure 1;

Figure 3 shows a position in the application of the assembly of Figure 1 with the sleeve partially recovered onto a substrate;

- 10 Figure 4 is a detail of the region B of Figure 3;

Figure 5 is a section through a portion of a second embodiment of the tubular member of the assembly as moulded;

- Figure 6 is a section corresponding to that of Figure 5 after the tubular member has been subjected to a longitudinal compression prior to mounting of the stretched sleeve
15 thereon;

Figure 7 is a section through a portion of a third embodiment of the tubular member of the assembly as moulded;

- Figure 8 is a section corresponding to that of Figure 7 after the tubular member has been subjected to a longitudinal compression prior to mounting of the stretched sleeve
20 thereon;

Figure 9 is a section through a fourth embodiment of the tubular member of the assembly as moulded;

Figure 10 is a schematic section through a portion of a fifth embodiment of the tubular member of the assembly as moulded;

Figure 11 is a schematic section through a portion of a sixth embodiment of the tubular member of the assembly as moulded;

Figure 12 is a schematic section through a portion of a seventh embodiment of the tubular member of the assembly as moulded;

5

Referring to Figures 1 to 4, an assembly comprises a cylindrical elastomeric sleeve 2 that is retained in a radially expanded configuration on a rigid right-cylindrical hold-out member 4. The hold-out member 4 comprises a first, outer portion 6 that supports the sleeve 2, and, contiguous therewith, an inner portion 8 that is folded back at one end of
10 the sleeve 2, passes within the tubular member outer portion 6 and then emerges from the other end of the assembly.

As can be seen in Figure 2, the hold-out member 4 has rectangular slits extending thereinto at longitudinally spaced apart locations, with a first set of slits 10 extending
15 from the inner surface and a second set of slits 12, alternating therewith, extending from the outer surface. The slits 10 and 12 extend continuously circumferentially around the tubular member 4 in planes that are substantially perpendicular to the longitudinal axis
14 of the assembly.

20 Referring specifically to Figures 3 and 4, the assembly is shown after it has been slid into position over a cylindrical substrate 16. As shown, the inverted free end 9 of the inner portion 8 of the hold-out member 4 is being pulled so as to bring about progressive inversion of the outer tubular portion 6, with the result that as the portion 6 is progressively withdrawn, the sleeve 2 recovers radially onto the surface of the

substrate 16. Complete withdrawal of the hold-out member 4 in this way will result in the entire length of the sleeve 2 recovering into close conformity with the substrate 16.

Figure 4 shows how the inversion and withdrawal of the hold-out member 4 is facilitated by the presence of the circumferential slits 10 and 12, the arrows X indicating the direction of movement of the hold-out member, and the arrows Y indicating the direction of recovery of the sleeve 2.

Thus, as the inner tubular member portion 8 is pulled in the direction X it peels away from the sleeve 2, and the inner slits 10 allow the tubular member 4 to compress as it inverts, the inversion being facilitated by the outer slits 12 allowing the tubular member 4 to stretch upon inversion, with the slits 10 and 12 remaining stretched as the inner portion 8 is then withdrawn through the annular region between the rigid portion of the member 4 and the substrate 16.

15

Figure 5 shows a section through the wall of a further embodiment of a tubular hold-out member 20 which has been formed in a mould so as to be of convoluted configuration with a set of generally U-shaped outer troughs 22 alternating with generally U-shaped inner troughs 24 to provide alternating inner and outer regions of weakness extending circumferentially around the tubular member 20.

20

Figure 6 shows the tubular member 20 after having been subject to a longitudinal compression so as substantially to close up the troughs 22 and 24 so as to provide a

substantially smooth outer surface for the hold-out tubular member 20 for receiving a radially stretched elastomeric sleeve 2 thereon.

Figure 7 shows a section through the wall of a still further embodiment of a tubular hold-out member 30 which has been formed in a mould so as to be of convoluted configuration with a set of outer troughs 32 alternating with inner troughs 34 to provide inner and outer regions of weakness extending circumferentially around the tubular member 30. In this embodiment, the innermost and outermost walls of the tubular member 30 are relatively thick and are interconnected by relatively thin, and thus more flexible, side portions 36.

Figure 8 shows the tubular member 30 after having been subject to a longitudinal compression so as substantially to close up the troughs 32 and 34 so as to provide a substantially smooth outer surface for the hold-out tubular member 30 for receiving a radially stretched elastomeric sleeve 2 thereon.

Figure 9 shows another embodiment of tubular member 37 of convoluted configuration with the inner space regions 38 being wider than the outer space regions 39. Whether longitudinal compression of the embodiments of Figures 5, 7 and 9 is necessary, and to what extent, will depend on the material of the hold-out member and on the material of the elastic sleeve, especially on the hardness thereof. Thus, the harder a material is selected for the sleeve, the less likely it is to deform into the openings at the outside of the hold-out member, and the greater the length of the openings longitudinally of the member can be. In the case of a multi-layer sleeve, its inner or innermost layer may be

of a harder material than outer layer(s). In this way, deformation into the regions of weakness of the hold-out member can be avoided, or at least minimised, whilst still providing sufficient radially-inwards pressure to ensure full recovery onto a substrate.

5 Referring to Figure 10, a tubular hold-out member 40 is shown schematically with relatively narrow slits 42 formed in its outer surface, and alternating therewith, relatively wide slits 44 in its inner surface. This represents the preferred general configuration of the tubular member of the assembly of the invention. Also, this figure shows by way of example a ratio of the wall thickness H of the tubular member to the
10 longitudinal length W of the sections thereof between successive regions of weakness of approximately 2:1.

In the embodiment of tubular hold-out member 50 shown schematically in Figure 11, slits 52 are shown provided only in the outer surface thereof. Also this shows that the
15 ratio of the wall thickness H to the "ring" width W is approximately 1:1.

In a further embodiment of tubular member 60 shown schematically in Figure 12, slits 62 in the outer surface thereof are relatively short, compared with the slits 52 of the tube 50 (Figure 11) whilst being spaced apart at substantially the same distance, giving
20 a ratio of the wall thickness H to the longitudinal extension W of the ring element of 1:3, for example.

It will be appreciated that each embodiment of hold-out member shown in Figures 10, 11 and 12 present a substantially - smooth outer surface for receiving the elastomeric sleeve.

14
Claims

1. An assembly comprising an elastic sleeve mounted in a radially stretched condition on a tubular member that extends therebeyond at one end of the sleeve,
5 wherein the tubular member includes a plurality of regions of weakness extending circumferentially therearound and discretely spaced apart along the length thereof.
2. An assembly according to claim 1, wherein the tubular member is of substantially right-cylindrical configuration.
- 10 3. An assembly according to claim 2, wherein the regions of weakness extend circumferentially substantially perpendicularly to the longitudinal axis of the tubular member.
- 15 4. An assembly according to any one of the preceding claims, wherein each region of weakness extends substantially continuously around the tubular member.
5. An assembly according any one of the preceding claims, wherein the regions of weakness comprise indentations extending into the wall of the tubular member from an
20 inner surface thereof.
6. An assembly according to any one of the preceding claims, wherein the regions of weakness comprise indentations extending into the wall of the tubular member from an outer surface thereof.

7. An assembly according to any one of claims 1 to 4, wherein the regions of weakness comprise indentations extending into the wall of the tubular member from an inner surface and from an outer surface thereof.

5

8. An assembly according to claim 7, wherein inner surface indentations alternate with outer surface indentations along the length of the tubular member.

10

9. An assembly according to any one of claims 1 to 4, wherein the regions of weakness are provided by the tubular member being of convoluted configuration.

10. An assembly according to claim 7 or claim 8, wherein the regions of weakness of the inner surface and of the outer surface of the tubular member are of a different length longitudinally of the tubular member.

15

11. An assembly according to claim 9, wherein the inner regions of weakness are longer than the outer regions of weakness.

20

12. An assembly according to any one of the preceding claims, wherein the regions of weakness comprises slits, preferably of substantially rectangular configuration.

13. An assembly according to any one of the preceding claims wherein the ratio of the depth of the regions of weakness transversely to the length of the tubular member to

the separation of the regions of weakness longitudinally of the tubular member is between about 1:3 and about 2:1.

14. An assembly according to any one of the preceding claims, wherein the extension of the tubular member beyond an end of the elastic sleeve is such that it is arranged to be passed back through the tubular member to be gripped from the other end, by an operator in use, so as to invert and draw the tubular member through itself, thus releasing the sleeve from its stretched condition.

15. An assembly according to claim 14, wherein the extension of the tubular member is at least as long as the sleeve, and preferably longer than the sleeve.

16. An assembly according to any one of the preceding claims, wherein the tubular member comprises a thermoplastic material or blends thereof, including cross-linked thermoplastic material.

17. An assembly according any one of the preceding claims, wherein the elastic sleeve comprises an elastomer or a rubber, preferably silicone or EPDM.

18. A method of enclosing an elongate substrate using an assembly according to any one of the preceding claims, wherein the assembly is positioned around the substrate with the stretched sleeve longitudinally disposed over its final required position with the extension of the tubular member located invertedly in the annular region between the tubular member and the substrate, wherein, whilst maintaining the

sleeve in its required position, the free end of the extension is pulled so as to invert the tubular member supporting the sleeve and to withdraw it through itself along the annular region until it is completely removed from the sleeve, thereby allowing the sleeve progressively to recover radially onto the substrate.

5

19. A method according to claim 18, wherein the assembly is used to recover the sleeve onto an electrical substrate, preferably a cable splice or termination.

20. An assembly of an elastic sleeve and a tubular member, substantially as

10

hereinbefore described with reference to the accompanying drawings.

21. A method of encasing a substrate using an assembly of an elastic sleeve and tubular member, substantially as hereinbefore described with reference to the accompanying drawings.

15

Sleeve on Holdout

Fig 1


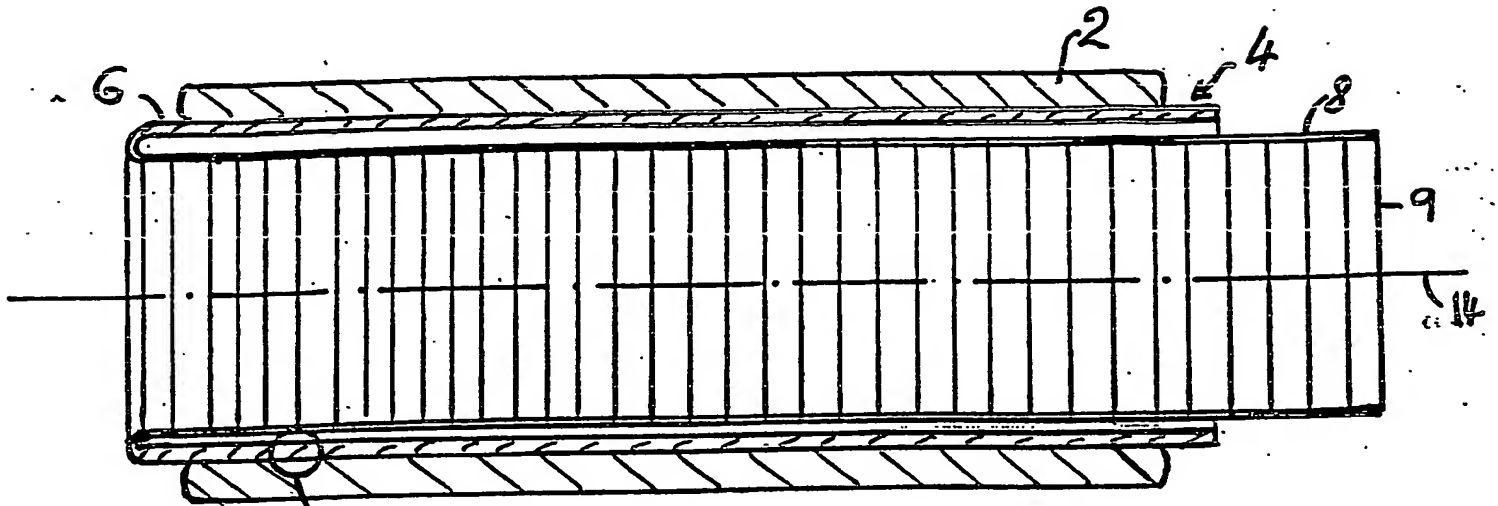


Fig 2

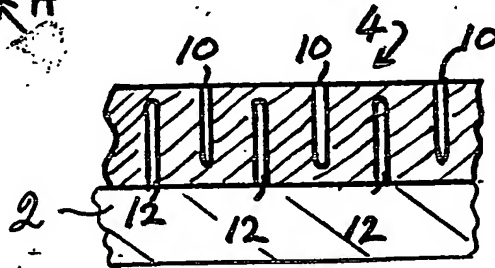

Detail of Holdout Profile

(thin cuts on inside and outside of former standard tube)

Release Process through of holdout)


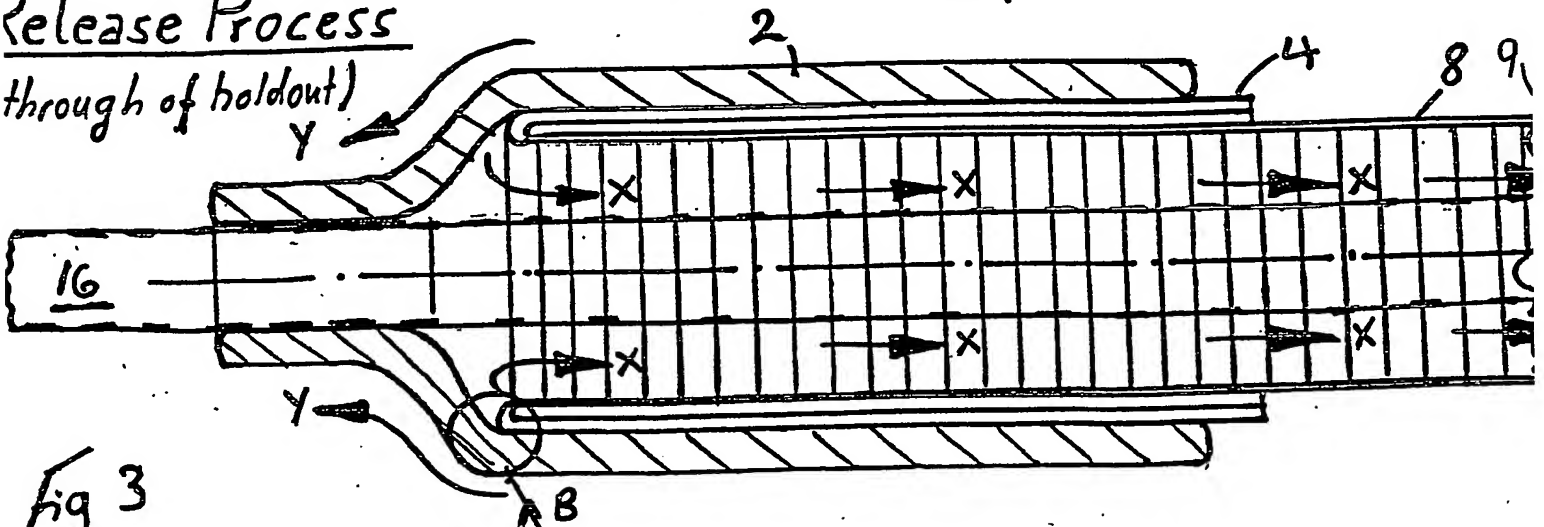


Fig 3

Fig 4

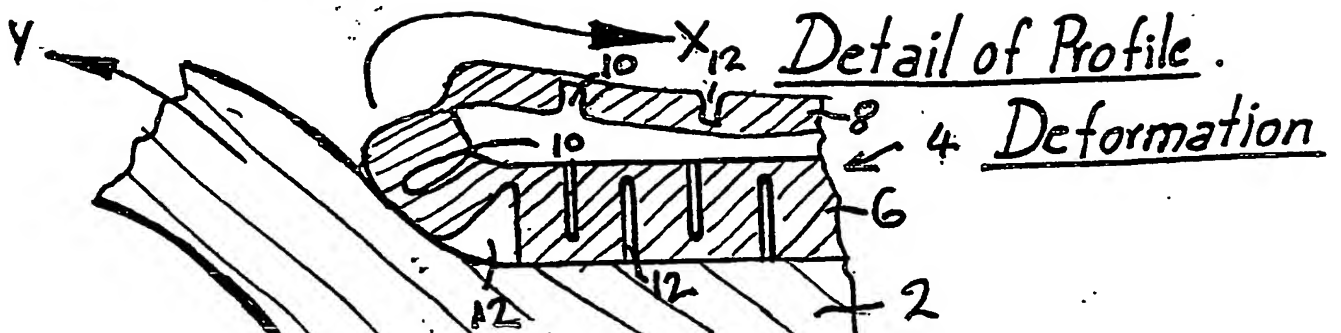

Detail of Profile

Deformation

Injection Moulded and Blow Moulded Profiles

(With and without Longitudinal compression before use)

shape without
for longitudinal
compression

①


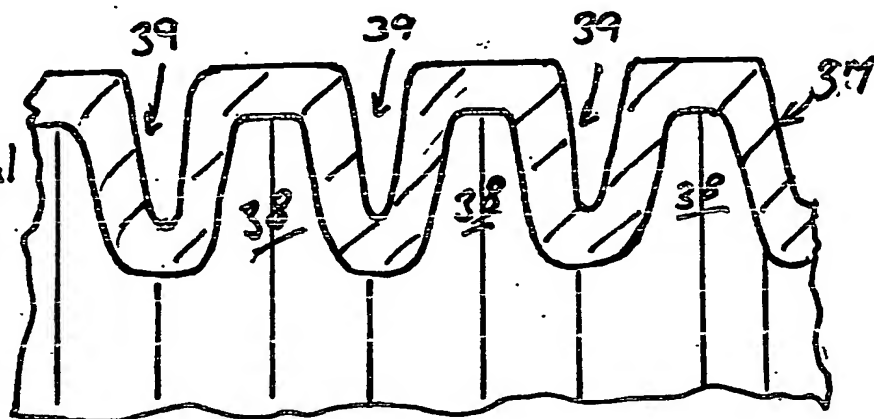




Fig 9

shape as moulded Fig 5

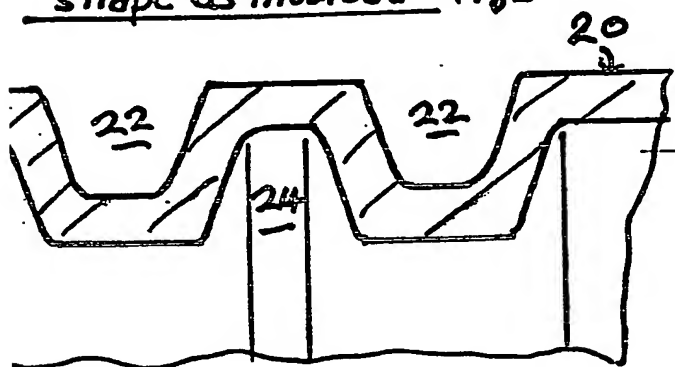

②

Fig 6
shape after longitudinal com-
pression

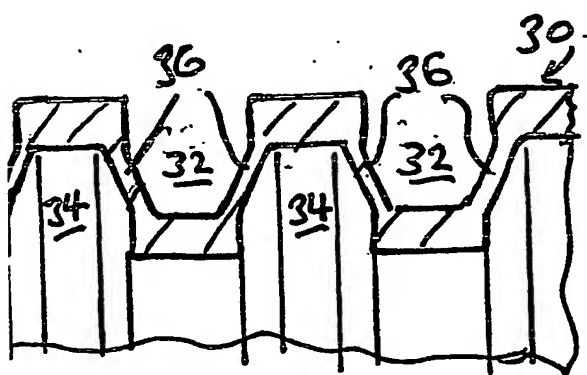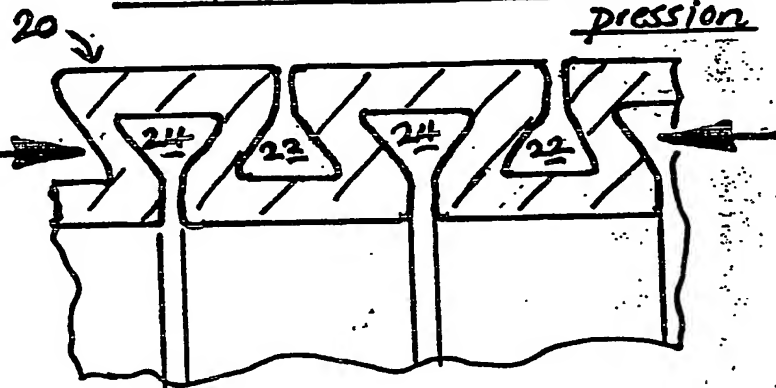

③

Fig 7


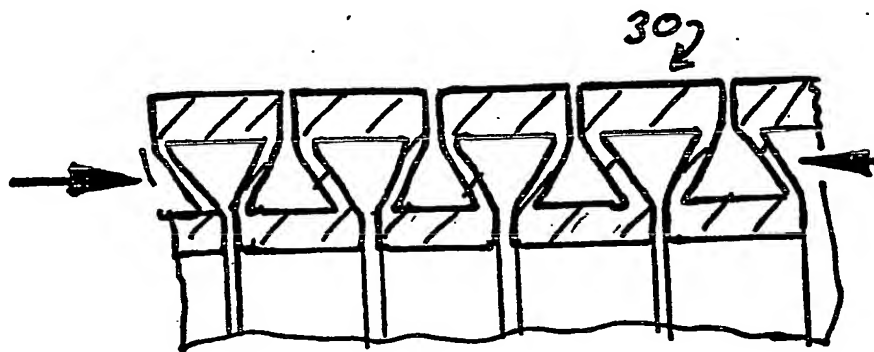


Fig 8

fig 10
(A)

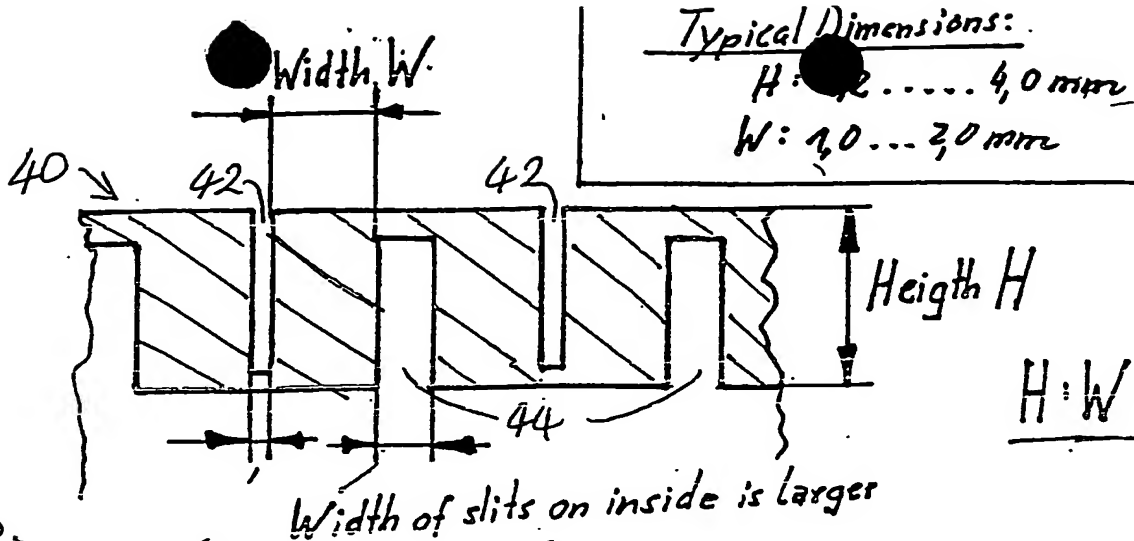

Typical Dimensions:


$H: 42 \dots 40 \text{ mm}$

$W: 10 \dots 20 \text{ mm}$

3/3


$$H:W = 2:1$$

fig 11
(B)

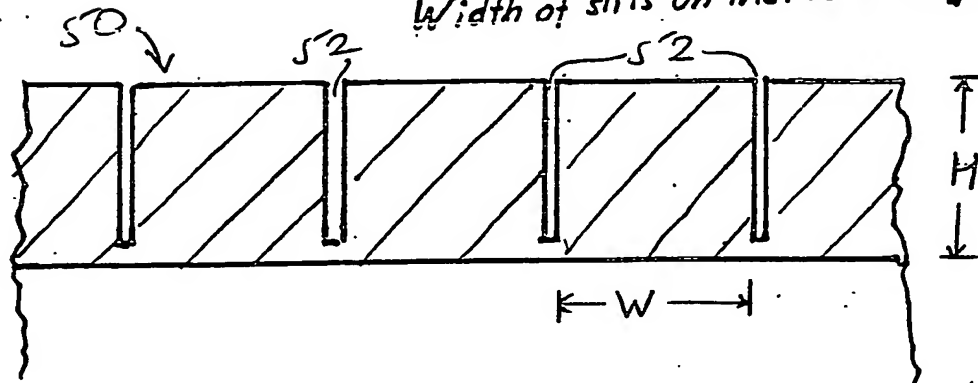

$$H:W = 1:1$$

fig 12
(C)

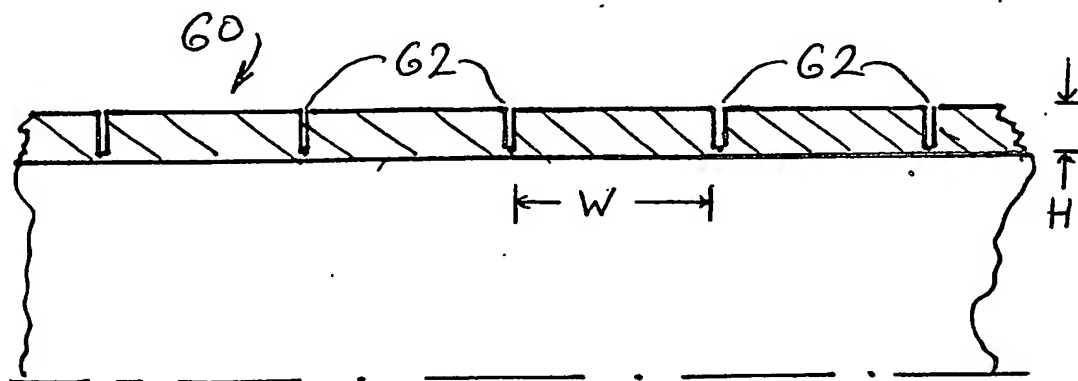

$$H:W = 1:3$$

[Faint, illegible text]

PCT Application
GB0304456

